



LAMPADA SLIMLINE CON SWITCH ON/OFF SERIE SL 025

La lampada Slimline SL 025 piatta è adatta per tutti i tipi di pannelli e armadi, soprattutto quando è importante ottimizzare lo spazio. Il dispositivo può essere montato su qualsiasi superficie con viti.

È disponibile anche con un magnete che gli permette di essere installato velocemente in qualsiasi posizione all'interno di armadi metallici. Entrambe le versioni sono disponibili con una presa elettrica integrata che consente l'uso di ulteriori apparecchi. Disponibile sia con interruttore sia con sensore di movimento.

Slimline Lamp SL 025 with on/off switch

The flat slimline lamp SL 025 is suitable for all types of panels and enclosures, especially where space is at a premium. The lamp can be mounted on its narrow or broad surface using screws. It is also available with a magnet which allows it to be fitted quickly in any position in a steel enclosure. Both versions are available with an integrated electrical socket enabling the use of additional appliances. Available with on/off switch or with movement sensor

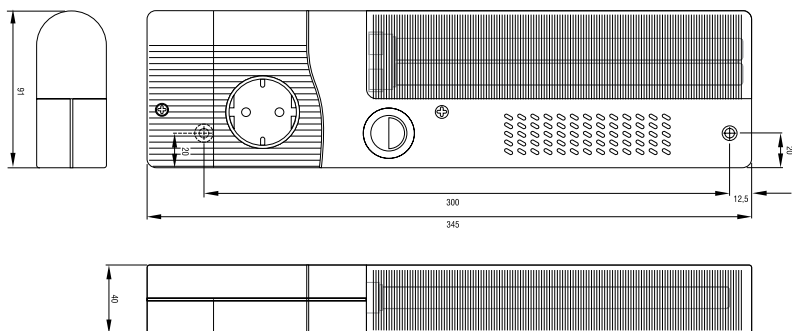

lampada Slimline con switch on/off serie SL 025

| TECHNICAL DATA | |
|---------------------------------|--|
| POWER CONSUMPTION | 11W (equals 75W light bulb) |
| LUMINOSITY | 900Lm |
| LAMP TYPE | energy saving lamp, 2G7 socket |
| SERVICE LIFE | 10,000h |
| SWITCH | on/off light switch |
| CONNECTION | terminal 2.5mm ² with cable clamp, torque 0.8Nm max. |
| MOUNTING | screw fixing, M5, 300mm centers |
| CASING | plastic according to UL94 V-0, light grey |
| DIMENSIONS | 345 x 91 x 40mm |
| FITTING POSITION | narrow surface/broad surface |
| OPERATING / STORAGE TEMPERATURE | -20 to +50°C (-4 to +122°F) / -45 to +70°C (-49 to +158°F) |
| PROTECTION TYPE | IP20 |
| NOTE | The slimline lamp SL 025 is also available with a 19" front panel, 24VDC to 48VDC on request |

| Art. No | Mode | Operating Voltage | Socket | Nominal Current | Weight (approx.) | Protection class | Approvals |
|------------|----------------|-------------------|--------------------|-----------------|------------------|-----------------------|---------------------------|
| 02520.0-00 | without magnet | 230VAC, 50/60Hz | Germany/Russia (1) | 16.0A | 0.40kg | I (earthed) | VDE |
| 02520.1-01 | with magnet | 230VAC, 50/60Hz | Germany/Russia (1) | 16.0A | 0.50kg | I (earthed) | VDE |
| 02521.0-00 | without magnet | 230VAC, 50/60Hz | France/Poland (2) | 16.0A | 0.40kg | I (earthed) | VDE |
| 02521.1-04 | with magnet | 230VAC, 50/60Hz | France/Poland (2) | 16.0A | 0.50kg | I (earthed) | VDE |
| 02522.0-00 | without magnet | 230VAC, 50/60Hz | Switzerland (3) | 10.0A | 0.40kg | I (earthed) | VDE |
| 02522.1-01 | with magnet | 230VAC, 50/60Hz | Switzerland (3) | 10.0A | 0.50kg | I (earthed) | VDE |
| 02523.0-00 | without magnet | 230VAC, 50/60Hz | UK/Ireland (4) | 13.0A | 0.40kg | I (earthed) | VDE |
| 02523.1-05 | with magnet | 230VAC, 50/60Hz | UK/Ireland (4) | 13.0A | 0.50kg | I (earthed) | VDE |
| 02524.0-01 | without magnet | 120VAC, 50/60Hz | USA/Canada (5) | 15.0A | 0.40kg | I (earthed) | UL File No. E234324 |
| 02524.1-05 | with magnet | 120VAC, 50/60Hz | USA/Canada (5) | 15.0A | 0.50kg | I (earthed) | UL File No. E234324 |
| 02527.0-00 | without magnet | 230VAC, 50/60Hz | none | - | 0.40kg | II (double insulated) | VDE + UL File No. E234324 |
| 02527.1-14 | with magnet | 230VAC, 50/60Hz | none | - | 0.50kg | II (double insulated) | VDE |
| 02527.0-10 | without magnet | 120VAC, 50/60Hz | none | - | 0.40kg | II (double insulated) | UL File No. E234324 |
| 02527.1-11 | with magnet | 120VAC, 50/60Hz | none | - | 0.50kg | II (double insulated) | UL File No. E234324 |