

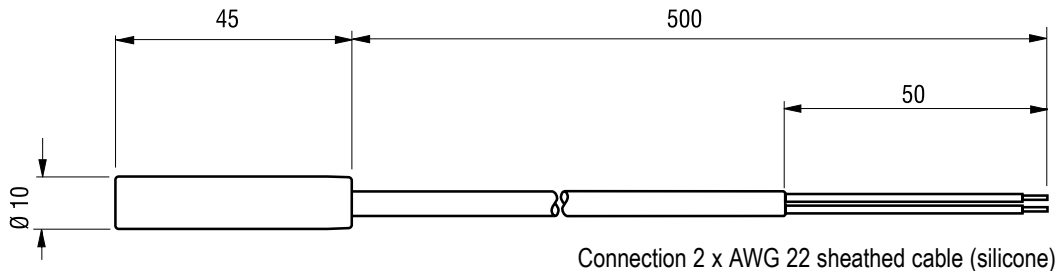


PICCOLO RISCALDATORE A SEMICONDATTORE SERIE RCE 016

I riscaldatori sono progettati per impedire la condensa e garantiscono una minima temperatura di funzionamento per operare in spazi di piccole dimensioni. I termostati controllano e regolano apparecchi di riscaldamento, ventilatori con filtro, scambiatori di calore e climatizzatori in caso di superamento per eccesso o per difetto di determinati valori di temperatura e di umidità.

Small semiconductor Heater RCE 016 Series

Heaters designed to prevent condensation and to ensure a minimum operating temperature in small enclosures. Prerequisite for a clean operation of your components is the right climate in your enclosure. Thermostats are used for the control of heaters, filter fans, heat exchangers and air conditioning equipment. They activate when set temperature or humidity values are exceeded or have fallen below.



Mounting clips Art. No. 09008.0-01 (1 packing unit = 2 pieces)



Piccolo riscaldatore a semiconduttore serie RCE 016

| TECHNICAL DATA | |
|------------------------------------|--|
| OPERATING VOLTAGE | 120-240V AC/DC* (min. 110V, max. 265V) |
| HEATING ELEMENT | PTC resistor, self regulating and temperature limiting |
| HEATER BODY | aluminium |
| MOUNTING | see Accessories |
| FITTING POSITION | variable |
| DIMENSIONS | length 45mm, Ø 10mm |
| OPERATING / STORAGE TEMPERATURE | -45 to +70°C (-49 to +158°F) |
| PROTECTION TYPE / PROTECTION CLASS | IP32 / II (double insulated) |
| APPROVALS | VDE + UL File No. E150057 |
| ACCESSORIES | mounting clips (see illustration), Art. No. 09008.0-01 |
| NOTE | other voltages on request |

*Operating with voltages below 140V AC/DC reduces heating performance by approx. 10%.

| Art. No | Heating capacity* | Inrush current max. | Surface temperature (approx.) | Connection | Weight (approx.) |
|------------|-------------------|---------------------|-------------------------------|--------------------------------------|------------------|
| 01622.0-00 | 5W | 2.0A | 165°C | 2 x AWG 22 sheathed cable (silicone) | 20g |
| 01623.0-00 | 9W | 2.5A | 175°C | 2 x AWG 22 sheathed cable (silicone) | 20g |

*at 20°C (68°F) ambient temperature